

PRODUCT BRIEF

60W REDUNDANT POWER SUPPLY




VISIONAIRtronics GmbH
Aeusseres Hirschfeld 15,
7100 Neusiedl/See, Austria

T +43-2167-90618 00

E info@vat.aero


W www.vat.aero

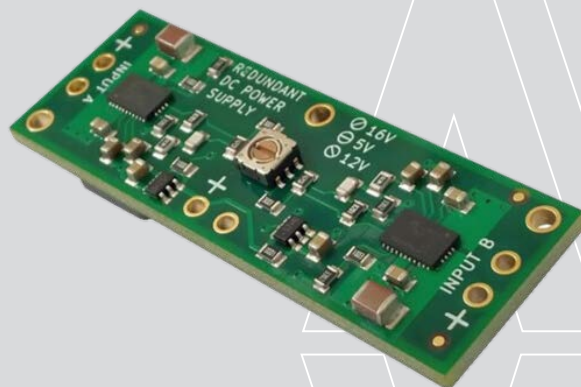

The Redundant DC Power Supply consists of two identical DC-DC switching converters and a low-loss (ideal diode) power combining stage. It is intended as a high-reliability source of power for mission critical UAV sub-systems.

The output voltage may be set to 5, 12 or 16V using the on-board switch and a screwdriver. Inputs are reverse polarity protected, and the input voltage range extends to +50VDC, allowing direct connection of LiPos up to 12S.


Each DC-DC converter is capable of delivering up to 3 Amps continuously with up to 96% efficiency. The output tolerates a short-circuit to ground indefinitely.

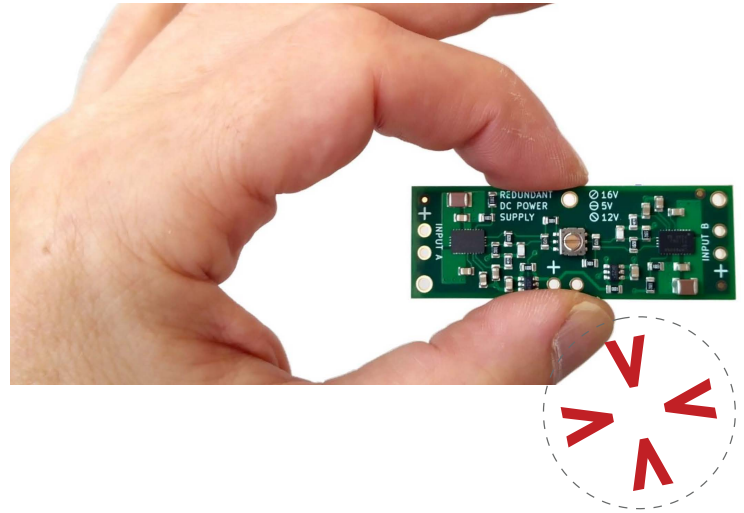

FEATURES

- low weight
- small form-factor
- redundant output
- operates from battery voltages of 2.5 to 50 VDC
- user-selectable output voltage



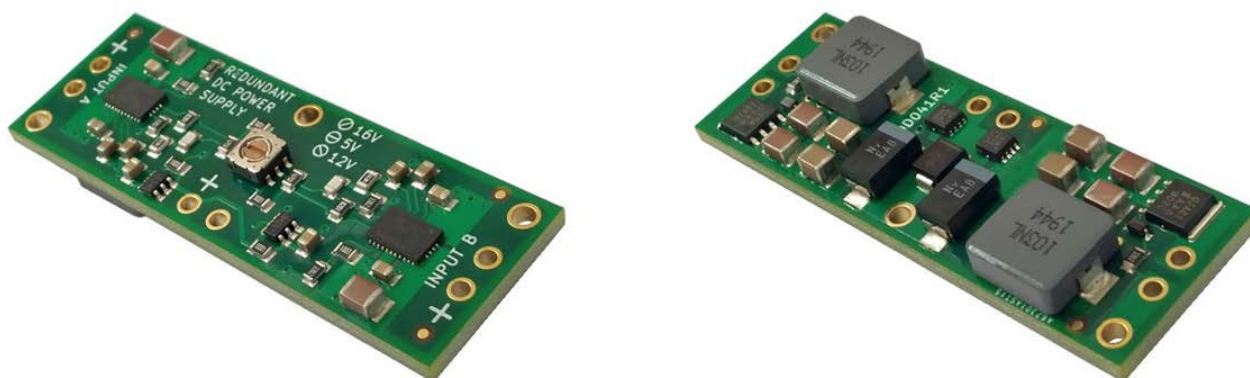

60W RPS board

SPECIFICATIONS IN BRIEF

Electrical

Input voltage	+2.5 to 50 VDC, (absoute max. -60 to +60 VDC)
Output voltage	5, 12 or 16 VDC, user selectabel via 3 position switch
Output curent	3 Amps continuous (thermal de-rating applies)
Quiescent current consumption	5mA maximum (per converter) over operational input voltage range

Miscellaneous

Thermal resistance (device to ambient)	23°C/W (temperature rise per Watt of dissipated power in still air)
Operating temperature range	-40°C to + 55°C
Maximum device temperature	+105°C
Dimensions	57 x 20 x 9.2 mm
Weight	13g
Mounting	3 x 2.1 mm diameter holes, sozed for M2 screws), located on 15 x 26 mm grid
Connections	3 pairs of 1.65mm diameter through-holes, suitable for direct soldering of wires

