

High Performance, Dual Thermal and Visible OEM Camera Module


## HADRON™ 640 SERIES



The ITAR-free Hadron 640 series pairs a 64MP visible camera with a performance-leading 640x512 resolution radiometric Boson® or Boson+ thermal camera in a single easy-to-integrate module. With a size, weight, and power (SWaP) optimized design, it is an ideal dual sensor payload for integration into unmanned aircraft systems (UAS), unmanned ground vehicles (UGV), robotic platforms, and emerging AI applications utilizing Teledyne FLIR Prism™ software.

Hadron 640 models share mechanical and electrical interfaces simplifying design. Compatible with Teledyne FLIR's Prism AI detection, tracking, and classification models and Prism ISP libraries for super-resolution, turbulence mitigation, contrast enhancement, and more, Hadron 640 series enables effective AI-based applications. With drivers available for market leading processors from NVIDIA®, Qualcomm®, and more plus industry-leading integration support, Hadron 640 also reduces development cost and shortens time to market.

Evaluate Prism with the Hadron 640R using the Prism Development Kit for Qualcomm RB5 today.

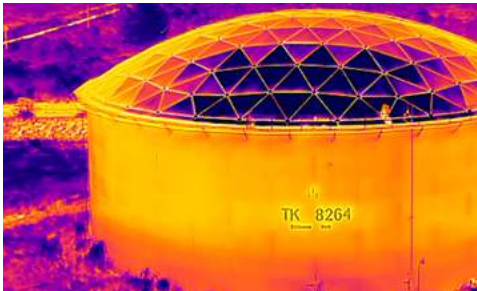

### INDUSTRY-LEADING THERMAL AND VISIBLE CAMERA PERFORMANCE

Collect high-speed, dual VGA radiometric thermal and HD visible imagery in all light conditions.


- AI-ready with Teledyne FLIR Prism AI and ISP
- 64MP visible camera resolution
- Available radiometric, 640x512-resolution Boson+ provides industry leading NEDT of  $\leq 20$  mK
- Flexible dual 60 Hz video output via USB or MIPI



### BUILT FOR INTEGRATORS

Reduce development cost and time to market with solution from a single, reliable supplier

- ITAR free and classified under US Department of Commerce jurisdiction as ECCN 6A003.b.4.b
- Drivers and sample code available for NVIDIA Jetson Nano, Qualcomm RB5, and more
- Highly qualified, technical services team available to support integration
- Evaluate capabilities with Prism Development Kit for Qualcomm RB5

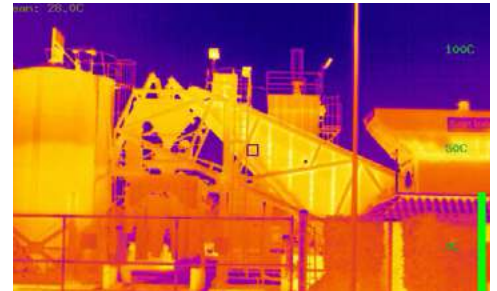

### SIZE, WEIGHT, AND POWER OPTIMIZED DESIGN

Optimize design and operation time with compact, lightweight, and low-power module.

- Low, steady state power consumption at 1.8W
- IP54-rated dust and water protection
- Lightweight 56 g enables longer flight time and extends battery life
- Shared mechanical and electrical interface across all models


For more information visit:  
[www.flir.com/hadron](http://www.flir.com/hadron)

Imagery for illustration purposes only. Specifications are subject to change without notice. ©2025 Teledyne FLIR LLC, Inc. All rights reserved.  
01/30/2025 REV1

## SPECIFICATIONS

Imaging & Optical	Hadron 640R	Hadron 640+	Hadron 640R+
Thermal Imaging Detector	Boson 640 x 512 pixels, 12 μm pitch, USB 3.0, 2-lane MIPI	Boson+ 640 x 512 pixels, 12 μm pitch, USB 3.0, 2-lane MIPI	Boson+ 640 x 512 pixels, 12 μm pitch, USB 3.0, 2-lane MIPI
Thermal Sensitivity	<40 mK	<20 mK	<20 mK
EO Camera Optics	EFL 4.8mm, 67° HFOV, F/# 1/2.3		
EO Camera Sensor	9248 x 6944 pixels (64.2 MP), 0.7 μm pitch, 4-lane MIPI		
EO Camera Video	Full resolution @ 60Hz		
Aspect Ratio, Visible	4 to 3		
IMU	ICM20602, I2C or SPI (selectable)		
IR Camera Optics	EFL 13.6mm, 32° HFOV, F/# 1.0		
IR Camera Video	Full resolution @ 60Hz		
Aspect Ratio, Thermal	5 to 4		
<b>Radiometry</b>			
Temperature Accuracy	±5 °C or less, over 0 °C to 100 °C range	Non-Radiometric	±5 °C or less, over 0 °C to 100 °C range
<b>Electrical</b>			
Electrical Interface	Hirose DF40C-50DP-0.4V(51) Example of mating connector: DF40HC(2.5)-50DS-0.4V(51)		
Power	5V supply voltage. Typical power dissipation < 1800mW, Max < 2900mW		
<b>Mechanical</b>			
Mechanical Interface	Screw mount to back plate		
Size [w_o lens]	35 x 49 x 45 mm (1.38" x 1.93" x 1.77")		
Weight	56 g		
<b>Environment &amp; Approvals</b>			
Environmental Sealing	IP54 (with the rear interfaces sealed)		
Operational & Storage Temperature	-20 °C to +60 °C		
Tested EMI Performance	FCC part 15 Class B		
<b>Software</b>			
Software Drivers*	NVIDIA Jetson Nano, Qualcomm Snapdragon RB5, Qualcomm Snapdragon 865  *Contact Teledyne FLIR for latest software drivers		
<b>Ordering</b>			
Part Numbers	70640A034-6C48068	70640AS32-6PAAXP	70640AS32-6PARXP

## DEVELOPMENT KITS



NVIDIA Jetson Nano



Qualcomm Snapdragon RB5



Qualcomm Snapdragon 865

**SANTA BARBARA**  
Teledyne FLIR LLC, Inc.  
6769 Hollister Ave.  
Goleta, CA 93117  
PH: +1 805.690.6602

**EUROPE**  
Teledyne FLIR LLC, Inc.  
Luxemburgstraat 2  
2321 Meer  
Belgium  
PH: +32 (0) 3665 5106

Specifications are subject to change without notice.  
For the most up-to-date specs, go to [www.flir.com/hadron](http://www.flir.com/hadron)

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2024 Teledyne FLIR LLC, Inc.

Approved for public release. Teledyne FLIR Approved [FLIRGTC-SBA-001]

All rights reserved. Revised 01/30/2025

24-0531-OEM-UAS-Hadron-640-Datasheet-LTR

For more information visit:  
[www.flir.com/hadron](http://www.flir.com/hadron)