

# GLOBAL SATELLITE ASSET TRACKER

## ADVANCED TRACKING & ANALYTICS - ANYWHERE

The ONYX is an extremely small GPS Satellite tracker that tracks mobile assets with seamless coverage globally. Small size, optional integrated power source, robust design and ease of mounting are key to a quick installation and successful operation. The Iridium satellite constellation with 66 satellites in Low Earth Orbit (LEO) and truly global coverage provide low-latency two-way communication with the ONYX.

ONYX is compatible with the XeosOnline™ monitoring software, providing data analytics & monitoring functions for all applications. XeosOnline™ provides street map positioning, alarm notifications for a variety of triggers and conditions, and over the air command & control of the ONYX. Utilize the user configurable Input/Output to retrieve data from external sensors/devices and/or trigger alarms – all from the other side of the globe.

### KEY FEATURES:

- » **Small Design**
- » **Lower power for longer battery life**
- » **Easy to use**
- » **Multiple configurations available**
- » **Integrated rechargeable battery pack (optional)**
- » **Integrated antennas**
- » **Two-way global communication via Iridium satellite**
- » **User Configurable I/O and over the air programming**
- » **Compatible with Xeos Online™ and other server based applications**
- » **AES256 Encryption**

The flexible design of the ONYX allows for a wide variety of applications. Use the default settings for standard operations or maximize power management for long deployments. Customize alarm modes and sensor management. Ease of use and extensive functionality in a miniature package.




**Data Telemetry Specialists**

36 Topples Drive, Dartmouth  
Nova Scotia, Canada B3B 1L6

Tel: 902.444.7650  
Fax: 902.444.7651

sales@xeostech.com  
www.xeostech.com

# ONYX

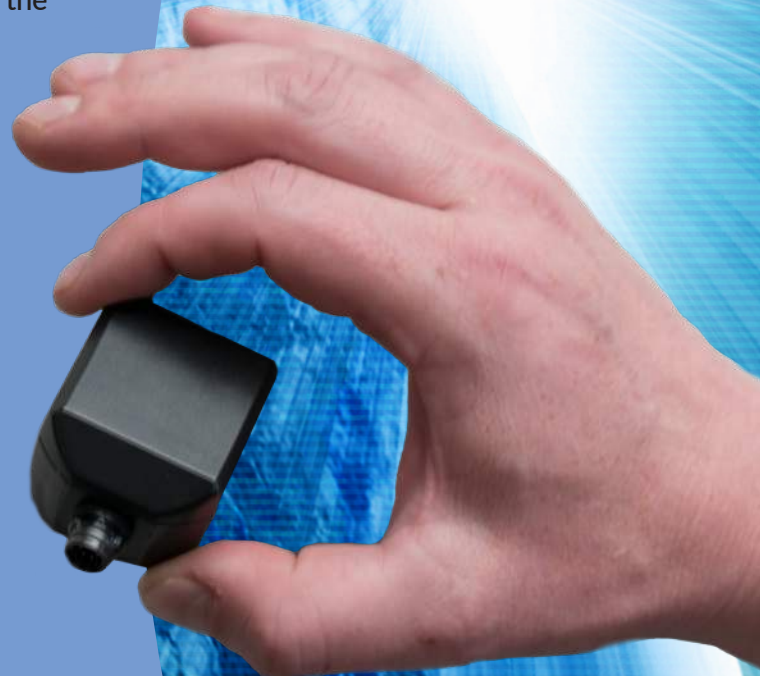

# ONYX

## TECHNICAL SPECIFICATIONS\*



**ONYX**



**ONYX  
OEM- STACK-  
NO ENCLOSURE**



**ONYX-I**



**ONYX-  
M2**



**ONYX-  
WB**



**ONYX-  
OEM FLAT**



**ONYX-R**

<b>CONNECTOR</b>	Hirose 6 pin, HR-30 Series, External Power Source, I/O Port	Header	None	Chogori 6 pin, IP-67, External Power Source, I/O Port	Chogori 6 pin, IP-67, External Power Source, I/O Port	Header	Hirose 6 pin, HR-30 Series, External Power Source, I/O Port
<b>VOLTAGE</b>	External 7 - 32V	External 7 - 32V	Internal 12V 4 x CR123A Li Batteries	External 7 - 32V	External 7 - 32V	External 7 - 24V	Internal 3.6V Li Rechargeable Battery
<b>IDLE CURRENT</b>	<50µA	<50µA	<50µA	<50µA	<50µA	<50µA	<100µA
<b>GPS CURRENT (30s Avg.)</b>	15mA	15mA	15mA	15mA	15mA	15mA	40mA
<b>IRIDIUM CURRENT (30s Avg.)</b>	50mA	50mA	50mA	50mA	50mA	50mA	70mA
<b>DIMENSIONS</b>	1.87" L x 1.44" W x 1.10" H	1.23" x 1.30" x .75"	4.89" x 1.71" x 1"	1.85" x 1.7" x 1.11	2.04" x 1.7" (2.9" w/ Tabs) x 1.1"	2.62" x 1.24" x .50"	4.73" x 1.7" x 1.11"
<b>IP Ratings</b>	IP65	N/A	IP68	IP67	IP67	N/A	IP67

### COMMON TO ALL ONYX MODELS:



Onyx Battery.  
Common to all models.

<b>Communications</b>	9603 Iridium Transceiver
<b>GPS Receiver</b>	Xeos Technologies 48 Channel GPS (SiRFStarV)
<b>Antenna</b>	Integrated Iridium and GPS Antenna
<b>Environmental</b>	Operating Temperature: -20° C to +60° C



\*Specifications subject to change without notice.

